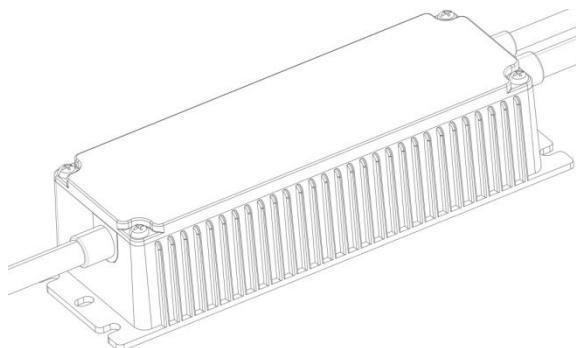


Features

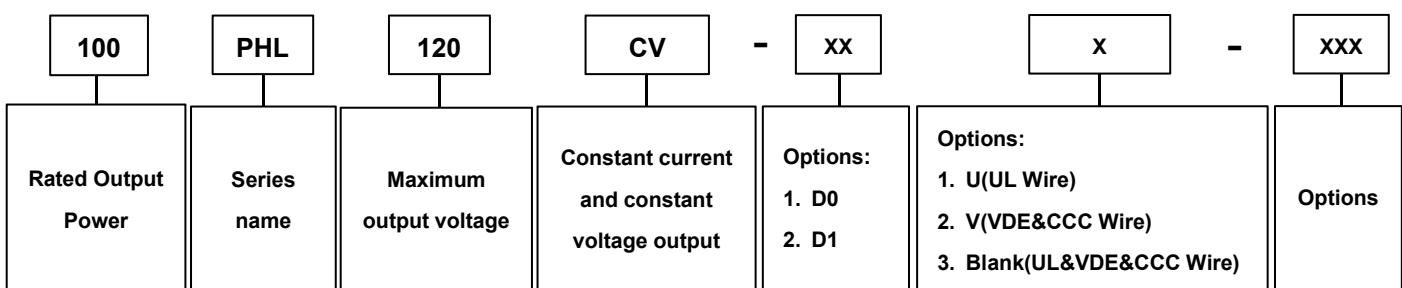
- Programmable constant current and voltage output
- High efficiency: 93% typical @220Vac, full load
- High power factor: 0.98 typical. @ 220Vac, full load
- Isolated 0-10V/PWM/ Resistor Dimming
- With Lightning Protection & all-round protections
- 6kV/10kV surge capability



Description

This specification describes the performance characteristics of a 100W versatile power supply for LED Driver. The output current of this series are programmable, and designed for 0-10V/PWM/Resistor dimming applications.

Model Name Definition



Specifications

Part Number	Max. Output Power	Programmable Current Range	Output Voltage Range	Efficiency typical@220VAC	Dimming	AUX power
100PHL60CV-D0	100W	0.95-2.38A	25-60V	92%	0-10V	12V 200mA
100PHL60CV-D1	100W	0.95-2.38A	25-60V	92%	1-10V	/
100PHL120CV-D0	100W	0.48-1.19A	60-120V	93%	0-10V	12V 200mA
100PHL120CV-D1	100W	0.48-1.19A	60-120V	93%	1-10V	/

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Rated Input AC Voltage	100 Vac	-	277Vac	
Limit Input AC Voltage	90Vac	-	305Vac	
Input Frequency	47 Hz	50/60 Hz	63 Hz	
Leakage Current	-	-	0.75 mA	At 220Vac / 50Hz input , grounding effectively
Input AC Current	-	-	0.55A	Measured at full load and 220 Vac input.
Inrush Peak Current	-	-	110A	At 220Vac input, 25°C cold start. See Inrush Current Waveform for the details.
PF	0.95	-	-	At 220Vac, 80%-100% load, 25°C and 60Hz

THD	-	-	15%	At 220Vac, 80%-100% load, 25°C and 60Hz
Efficiency	91%	92%	-	100PHL60CV: Measured at 220Vac input, 100% load and steady-state temperature in 25°C ambient
	92%	93%	-	100PHL120CV: Measured at 220Vac input, 100% load and steady-state temperature in 25°C ambient

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%Io set	-	5%Io set	At 25°C and full load condition
Total Output Current Ripple (pk-pk)	-	-	15%Io max	At 25°C and full load condition, 8kHz BW
Startup Overshoot Current	-	-	20%Io max	At 25°C and full load condition, 8kHz BW
No Load Output Voltage	-	-	75V	100PHL60CV
	-	-	155V	100PHL120CV
Line Regulation	-	-	±3%	Measured at 25°C and full load
Load Regulation	-	-	±3%	At 25°C condition
Turn-on Delay Time	-	-	2.0 s	Measured at 220Vac input.
Temperature Coefficient of Io set	-0.05%/ [°] C	-	0.05%/ [°] C	Case temperature = 0°C ~Tc max
12V Auxiliary Output Voltage (100PHL60CV-D0/100PHL120CV-D0)	11V	12 V	15 V	
12V Auxiliary Output Source Current (100PHL60CV-D0/100PHL120CV-D0)	0 mA	-	200 mA	Return terminal is “Dim-“
OTP Tc	85°C	90°C	95°C	Output current will drop or shut down.
SCP				Hiccup mode, Auto recover
OPP				Auto recover
OCP				Auto recover

General Specifications

Parameter	Min.	Typ.	Max.	Notes
MTBF	234,000 Hours	-	-	Measured at 220Vac input, 80%load and 25 ° C ambient temperature (MIL-HDBK-217F)
Lifetime	50,000 Hours	-	-	Measured at 220Vac input, 100%load and 75 ° C case temperature; See lifetime vs. Tc curve for the details
Operating Case Temperature for Safety Tc_s	-40°C	-	90°C	
Operating Case Temperature for Warranty Tc_w	-40°C	-	80°C	
Operating Ambient Temperature	-40°C	-	60°C	At 220-277Vac input.

Ta				
Storage Temperature	-40°C	-	85°C	Humidity: 5%RH to 90%RH
IP Grade	IP67			
Dimensions				
Inches (L × W × H)	6.32×2.09×1.42 in			
Millimeters (L × W × H)	160.4×53×36mm			
Net Weight/pcs	-	543g	-	

Dimming Specifications

1. 0-10V Dimming(100PHL60CV-D0/100PHL120CV-D0)

Parameter	Min.	Typ.	Max.	Notes
Absolute Maximum Voltage on the Vdim (+) Pin	-1 V	-	15 V	
Source Current on Vdim (+)Pin	90uA	100uA	110uA	
Dimming Output Range	-	10%lo set	lo set	80%lo max ≤ lo set ≤ 100%lo max
	-	8%lo max	lo set	lo set <80%lo max
Recommended Dimming Input Range	0V	-	10 V	
Dim off Voltage	0.3 V	0.5 V	0.8V	
Dim on Voltage	0.5V	0.7 V	1 V	Default 0-10V dimming mode.
Dim off Resistance	5k Ω	8k Ω	10k Ω	
Dim on Resistance	7k Ω	10k Ω	12k Ω	
Hysteresis	-	0.2 V	-	
PWM_in High Level	9.5 V	10V	10.5 V	
PWM_in Low Level	-0.3 V	-	0.6 V	
PWM_in Frequency Range	500 Hz	-	3 KHz	
PWM_in Duty Cycle	1%	-	98%	
PWM Dimming off	3%	5%	7%	
PWM Dimming on	5%	7%	9%	

2. 1-10V Dimming(100PHL60CV-D1/100PHL120CV-D1)

Parameter	Min.	Typ.	Max.	Notes
Absolute Maximum Voltage on the Vdim (+) Pin	-1 V	-	15 V	
Source Current on Vdim (+)Pin	90uA	100uA	110uA	
Dimming Output Range	-	10%lo set	lo set	80%lo max ≤ lo set ≤ 100%lo max
	-	8%lo max	lo set	lo set <80%lo max
Recommended Dimming Input Range	1V	-	10 V	Default 1-10V dimming mode.
PWM_in High Level	9.5 V	10V	10.5 V	
PWM_in Low Level	-0.3 V	-	0.6 V	
PWM_in Frequency Range	500 Hz	-	3 KHz	
PWM_in Duty Cycle	1%	-	98%	

Safety & EMC Compliance

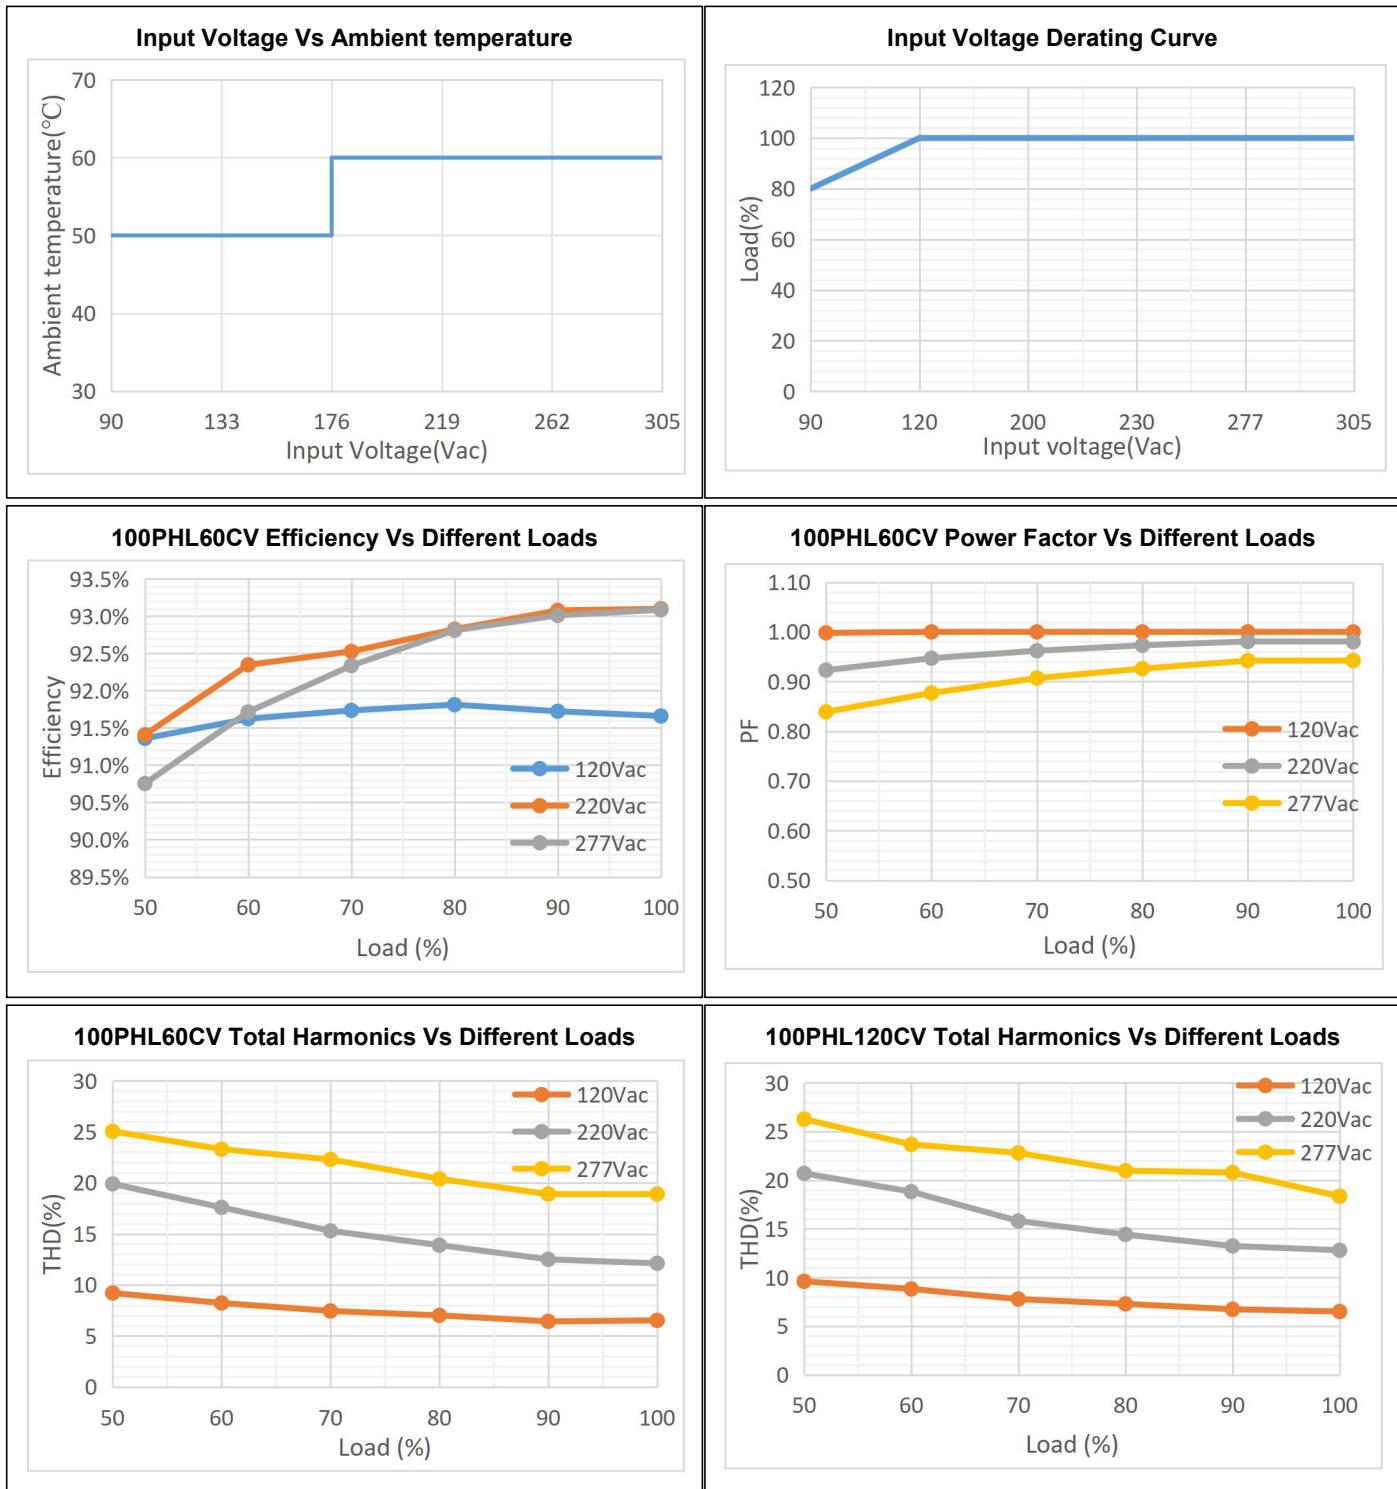
Safety Category	Standard
UL/CUL	UL8750,CAN/CSA-C22.2 No. 250.13-12
Dielectric Strength(Hi-pot)	Primary to Secondary: 3200Vac 10mA max
	Primary to Earth: 1600Vac 10mA max.
	Secondary to Earth: 1600Vac 10mA max.
	Dimming to Secondary: 1600Vac 10mA max.
Insulation Resistance	50Mohm min. @ primary to secondary add 500Vdc test voltage
Grounded Resistance	0.1 Ω max. @ 25A, 1 minute
ENEC&CE	EN61347-1, EN 61347-2-13
CB	IEC 61347-1, IEC 61347-2-13
CCC	GB19510.1, GB19510.14
EMI Standards	Notes
EN55015	Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired Operation.
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge, Criteria A
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS, Criteria A
EN 61000-4-4	Electrical Fast Transient / Burst-EFT: level 3, Criteria B
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 6kV, line to earth 10kV, Criteria B
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS, Criteria A
EN 61000-4-8	Power Frequency Magnetic Field Test, Criteria A
EN 61000-4-11	Voltage Dips Criteria B
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

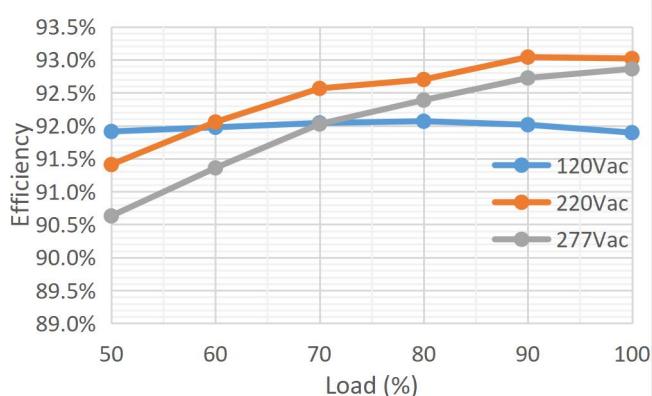
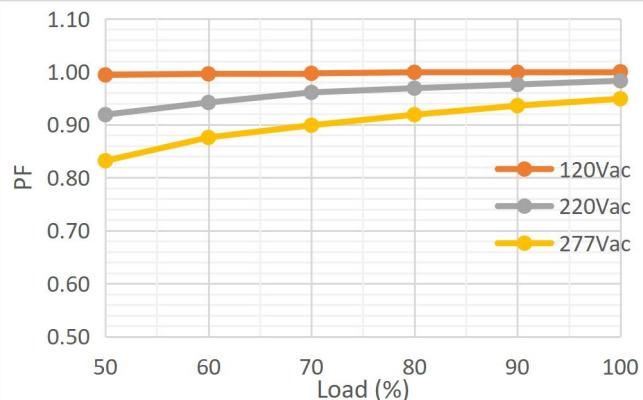
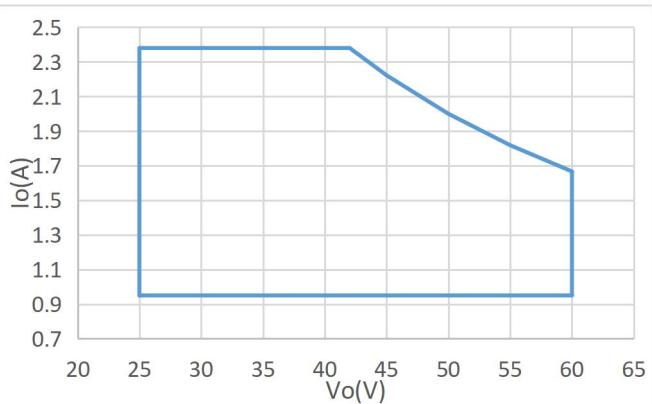
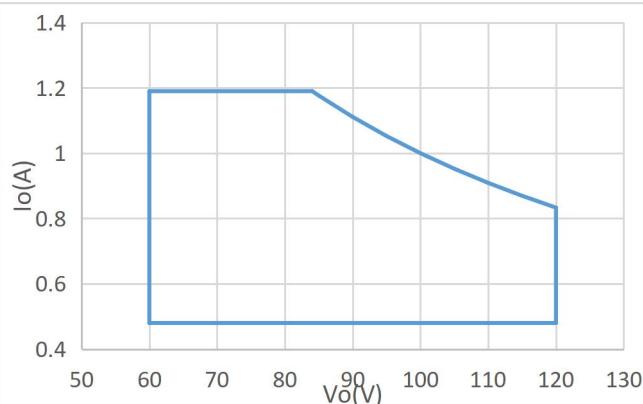
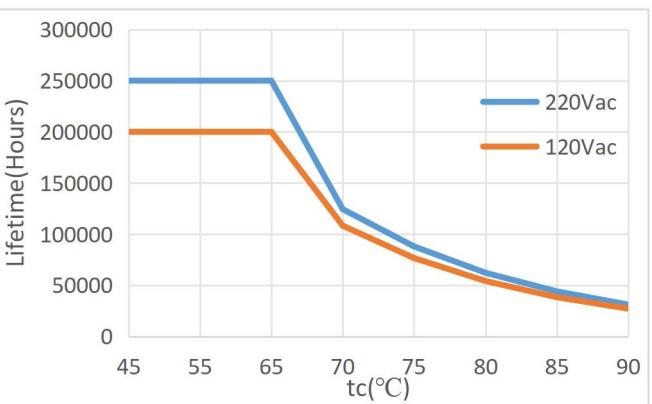
Inrush Current (@Full load and cold start)



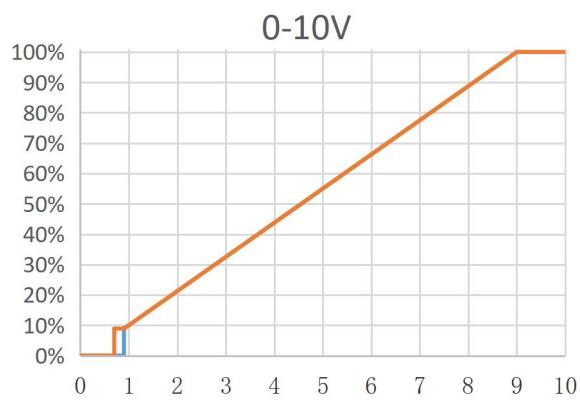
Vin(Vac)	Fin(Hz)	Ipeak(A)	T duration(us)
120	47	32.4	252.2
220	50	59.3	264.2
277	63	73.2	260.2

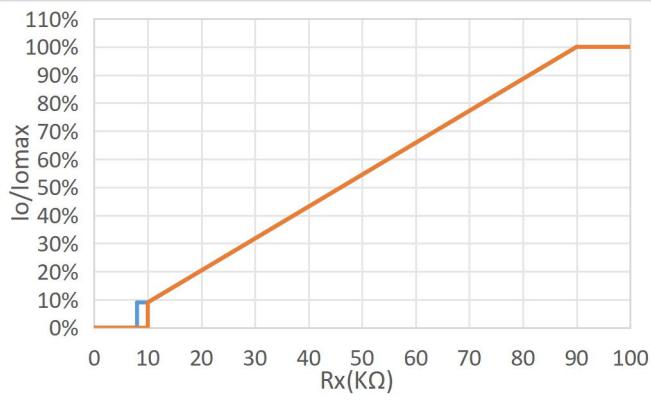
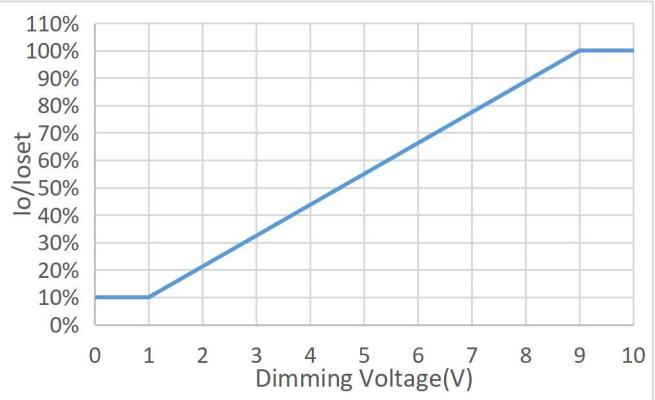
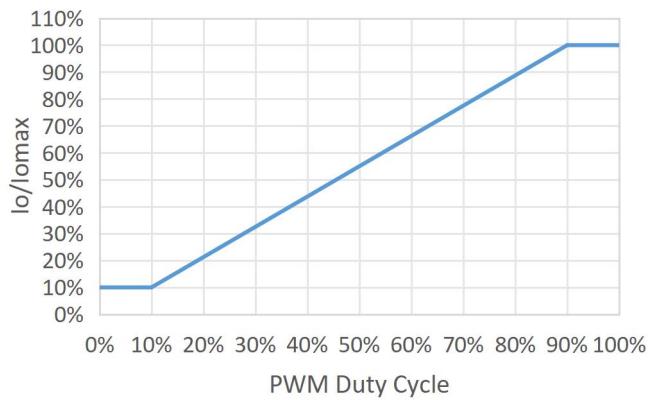
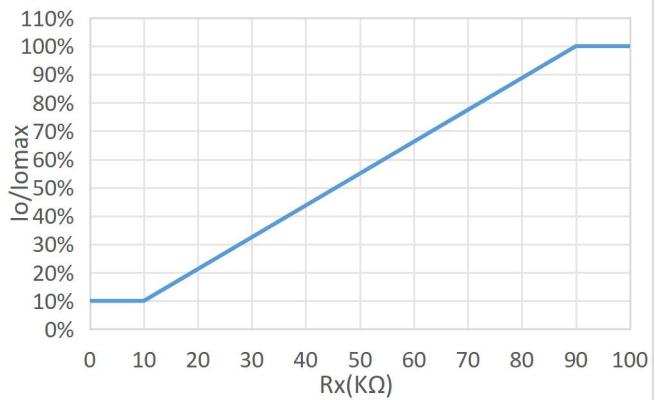
Performance Curve



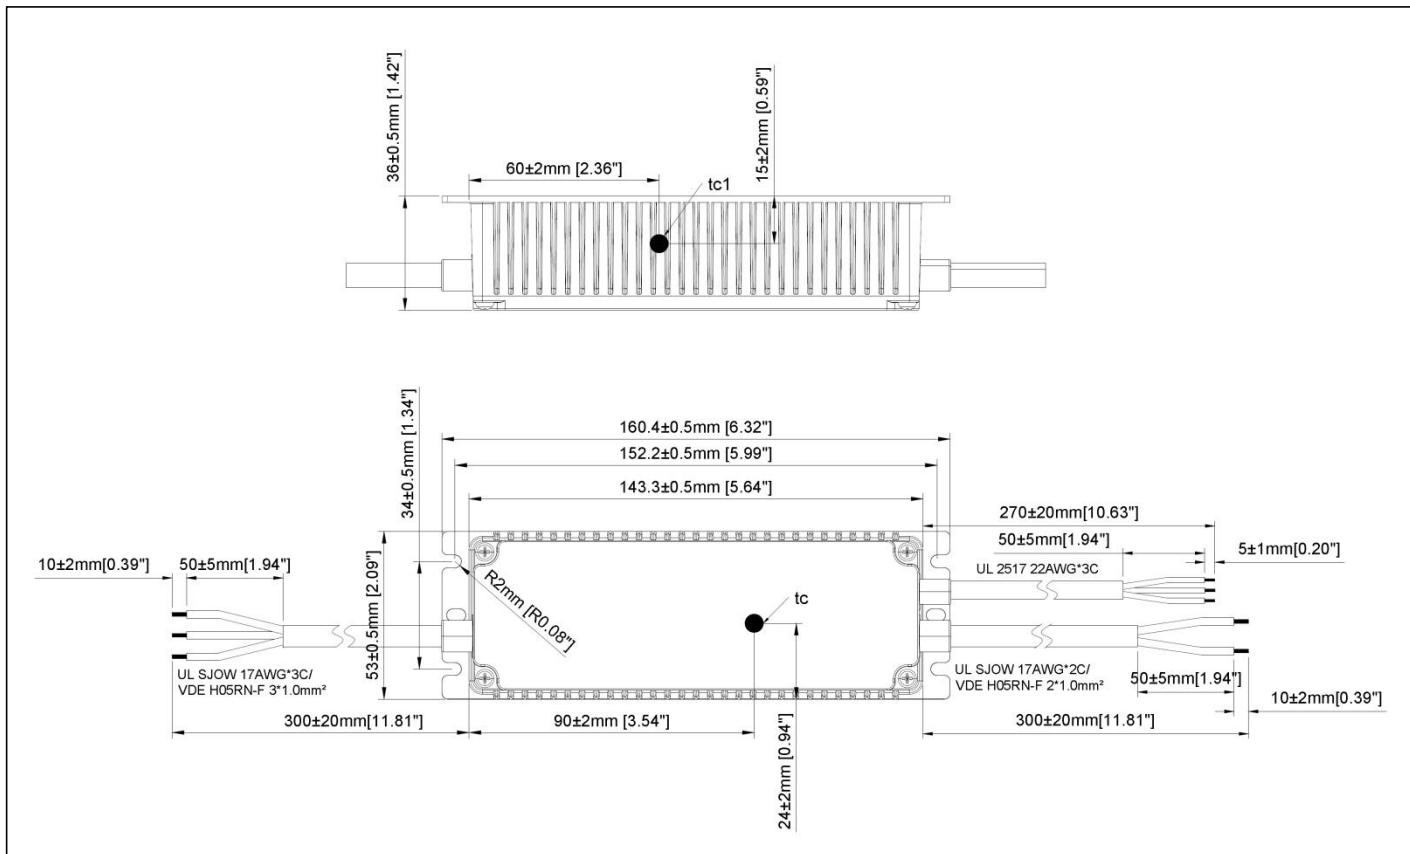
100PHL120CV Efficiency Vs Different Loads

100PHL120CV Power Factor Vs Different Loads

100PHL60CV I/V Operating Area

100PHL120CV I/V Operating Area

Life Vs Case Temperature


Dimming Curve

100PHL60CV-D0/100PHL120CV-D0 Io/Ir vs Vdim

100PHL60CV-D0/100PHL120CV-D0 Io/Ir vs Vdim

100PHL60CV-D0/100PHL120CV-D0 Io/Iomax vs Rx

100PHL60CV-D1/100PHL120CV-D1 Io/Ioset vs Dimming Voltage

100PHL60CV-D1/100PHL120CV-D1 Io/Iomax vs PWM Duty Cycle

100PHL60CV-D1/100PHL120CV-D1 Io/Iomax vs Rx


Mechanical Drawing



Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2023/3/10	V1.0			
2023/9/16	V1.1	Update Mechanical Drawing		
2023/9/28	V1.2	Update Mechanical Drawing		Update the installation size
2023/10/26	V1.3	Update Mechanical Drawing		Update the size and add tc
2023/12/27	V1.4	No Load Output Voltage	MAX: 132V	MAX: 170V
		Update mechanical design		
		Inrush Current	MAX: 125A	MAX: 110A
		Update Input Voltage Derating Curve		
		Add Net Weight		
		Operating Ambient Temperature Ta	MAX:70°C	MAX:55°C
2024/1/3	V1.5	Operating Ambient Temperature Ta	MAX:70°C	MAX:60°C
		Operating Ambient Temperature Ta	Note: At 200-277Vac input.	Note: At 220-277Vac input.
2024/1/9	V1.6	Dielectric Strength(Hi-pot)	Primary to Secondary:3000Vac / 10mA Max	Primary to Secondary: 3750Vac 10mA max

			Primary to Earth: 1500Vac 10mA max.	Primary to Earth: 1600Vac 10mA max.
			Secondary to Earth: 500Vac 10mA max.	Secondary to Earth: 1600Vac 10mA max.
			Dimming to Secondary: 1500Vac 10mA max.	Dimming to Secondary: 1600Vac 10mA max.
		No Load Output Voltage	MAX: 170V	MAX: 155V
		Add Input Voltage Vs Ambient temperature Curve		
		Update Model Name Definition		
		Safety Category		Add ENEC/CE/CB/CCC
		Input Frequency	Min: 45Hz	Min: 47Hz
		Dielectric Strength(Hi-pot)	Primary to Secondary: 3750Vac 10mA max	Primary to Secondary: 3200Vac 10mA max
		Delete 100PHL120CV-DA/100PHL60CV-DA		
		Total Output Current Ripple (pk-pk)	At 25°C and full load condition, ≤200Hz BW	At 25°C and full load condition, 8kHz BW
		Line Regulation/Load Regulation		Add 25° C
		Lifetime	Measured at 220Vac input, 80% load and 75 ° C case temperature; See lifetime vs. Tc curve for the details	Measured at 220Vac input, 100% load and 75 ° C case temperature; See lifetime vs. Tc curve for the details
		Add Inrush Current		
		Add 100PHL60CV PF/THD/EFF/lifetime curve; Update 100PHL120CV PF/THD/EFF Curve		
		PF/THD		Add 25°C and 60Hz
		Input Specifications		Add Efficiency
		No Load Output Voltage		Add Max: 75V(100PHL60CV)
		Startup Overshoot Current	Max: 10%Io max(At 25°C and full load condition)	Max: 20%Io max(At 25°C and full load condition, 8kHz BW)
		OTP Tc	Output current will drop to 50% lowest, or shut down.	Output current will drop or shut down.
		Add Dim off Resistance/Dim on Resistance		
		Input AC Current	Max: 0.5A	Max: 0.55A
		Update Mechanical Drawing		
		Update dimming curve		
2025/4/2	V1.8	Total Output Current Ripple (pk-pk)/Startup Overshoot Current	Note : At 25°C and full load condition, 8kHz BW	Note : At 25°C and full load condition, 8kHz BW
		Update the efficiency curve		

		coordinates		
--	--	-------------	--	--