

# LED Driver

## 1200FGH420C-xC-yyy

V0.1

2026/1/15

Powerland Signatures						
Prepared	Checked			Approved	Marketing	CPO
	Mechanical Engineer	Safety Engineer	R&D Manager			

Please return us one copy of the document with your approval signature.

请客户确认签字后回传我司此规格承认书。

**Powerland Technology Inc.**

南京博兰得电子科技有限公司

Building 9, No. 1 Zidan Rd., Qinhuai Dist., Nanjing, China

南京市秦淮区紫丹路设计产业园 9 号楼

Email: sales@powerlandtech.com Phone: +86-25-85582306

## 1200FGH420C-xC 1200W AC/DC Constant Current LED Driver

### Features


- Multi-channels constant current output
- High efficiency: 96% typical @400Vac, full load
- High power factor: 0.95 typical. @ 400Vac, full load
- Digital Dimming(UART Based Communication Protocol or RS485 Protocol) optional
- With Lightning Protection & all-round protections (OVP, OCP,SCP,OTP)
- IP65

### Description

This specification describes the performance characteristics of a 1200W non-isolated and isolated multi-output LED drive power supply.

The output current of this series are programmable.

### Model Name Definition

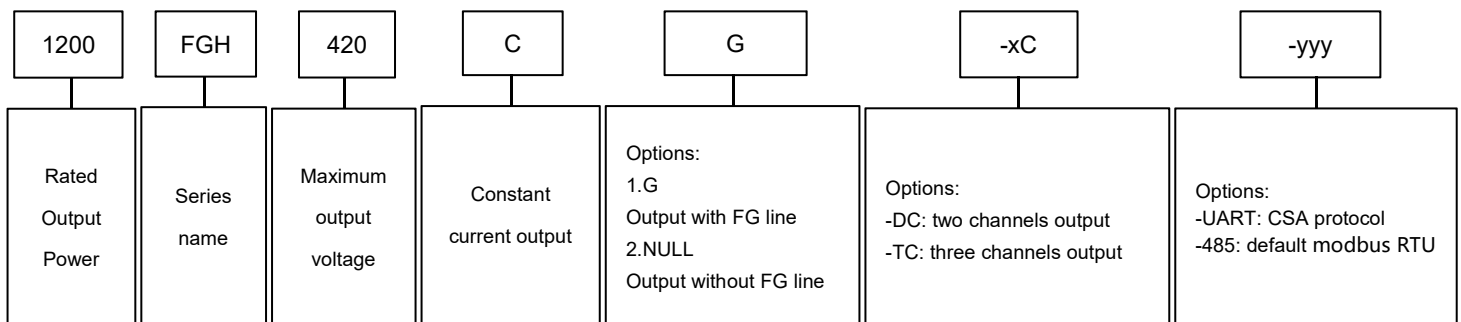

### Specifications

Part Number	Channels	PO_MAX (W)	IO_RANGE @ CC (A)	VO_RANGE (V)	Typical $\eta$ (%) @ 400VAC
1200FGH420C-DC	1	1000	1.6-4.5	200-420	96
	2	100	0.28-0.9	60-150	
1200FGH420C-TC	1	1000	1.6-4.5	200-420	
	2,3	100	0.28-0.9	60-150	

Note:CH1 channel is a non-isolated channel, CH2 and CH3 channels are isolated channels.

These protocols of different communication interfaces can be obtained from sales.

## Table of Contents

1. Input Specifications .....	2
2. Output Specifications .....	2
3. General Specifications .....	3
4. Dimming Specifications .....	3
5. Isolation .....	3
6. Safety & EMC Compliance .....	3
7. Performance Curve .....	4
7.1. Inrush Current Curve .....	4
Figure 1. Inrush Current @ full load and cold start .....	4
7.2. Derating Curve .....	5
Figure 2. Input Voltage Derating Curve .....	5
7.3. Lifetime Curve .....	5
Figure 3. Life vs Case Temperature .....	5
7.4. Operation Range Curve .....	5
Figure 4. I/V Operating Area for CH1 .....	5
Figure 5. I/V Operating Area for CH2/CH3 .....	5
7.5. General Performance Curve .....	6
Figure 6. Total Harmonics vs Different Loads .....	6
Figure 7. Efficiency vs Different Loads .....	6
Figure 8. Power Factor vs Different Loads .....	6
8. Mechanical Specification .....	7
Figure 9. Mechanical Drawing .....	7
9. Ordering information .....	7
10. Revision History .....	8

## 1. Input Specifications

	Parameter	Min.	Typ.	Max.	Unit	Notes
$V_{IN\_AC}$	Rated Input AC Voltage	347	-	400	VAC	
$V_{IN\_RANGE}$	Input AC Voltage Range	312	-	480	VAC	
$F_{LINE}$	Input Frequency	47	50/60	63	Hz	
$I_{LKG}$	Leakage Current	-	-	0.75	mA	At 400VAC/ 50Hz input , grounding effectively
$I_{IN\_AC}$	Input AC Current	-	-	3.4	A	Measured at 25°C, full load and 400VAC input.
$I_{PK\_INRUSH}$	Inrush Peak Current	-	-	35	A	At 400VAC input, 25°C cold start. See Inrush Current Waveform for the details.
PF	Power Factor	0.95	-	-		At 400VAC, 80%-100% load, 25°C and 50Hz
THD	Total Harmonic	-	-	20	%	
$\eta$	Efficiency	95	96	-	%	Measured at 400VAC input, 100% load and steady-state temperature in 25°C ambient

## 2. Output Specifications

	Parameter	Min.	Typ.	Max.	Unit	Notes
$I_{O\_ACCU}$	Output Current Accuracy relative to $I_o$ set	-5	-	5	%	At 25°C and full load condition. Can contact sales ask for better current tolerance.
$I_{O\_RIPPLE}$	Total Output Current Ripple (pk-pk) relative to $I_o$ max	-	-	10	%	At 25°C and full load condition, 8kHz BW
$I_{O\_OVERSHOOT}$	Startup Overshoot Current relative to $I_o$ max	-	-	10	%	At 25°C and full load condition, 8kHz BW
$V_{O\_OCV}$	No Load Output Voltage	-	-	500	V	Measured at RMS value
$V_{O\_LINE}$	Line Regulation	-	-	±3	%	Measured at 25°C and full load
$V_{O\_LOAD}$	Load Regulation	-	-	±3.5	%	
$T_{ON\_DELAY}$	Turn-on Delay Time	-	-	1	s	Measured 400VAC input to 90% output current
$I_{O\_TC}$	Temperature Coefficient of $I_o$ set	-0.03	-	0.03	%/°C	Case temperature = 0°C ~Tc max
$V_{O\_AUX}$	12V Auxiliary Output Voltage	11	12	15	V	
$I_{O\_AUX}$	12V Auxiliary Output Current	0	-	500	mA	Return terminal is "Dim"
$T_{OTP}$	Over Temperature Protection Threshold	90	95	100	°C	Output current will drop or shut down.
$I_{SCP}$	Short Circuit Protection Threshold					Shut down

### 3.General Specifications

	Parameter	Min.	Typ.	Max.	Unit	Notes
P <sub>STANDBY</sub>	Standby power	-	-	3	W	Measured at 400VAC/50Hz; Dimming off
T <sub>MTBF</sub>	MTBF	234,000	-	-	Hours	Measured at 400VAC input, 80% load and 25°C ambient temperature (MIL-HDBK-217F)
T <sub>LIFETIMELY</sub>	Lifetime	50,000	-	-	Hours	Measured at 400 VAC input, 100% load and 75°C case temperature; See Lifetime curve for the details
T <sub>C</sub>	Operating Case Temperature T <sub>c</sub>	-40	-	90	°C	
T <sub>A</sub>	Operating Ambient Temperature T <sub>a</sub>	-40	-	50	°C	
T <sub>STG</sub>	Storage Temperature	-40	-	85	°C	Humidity: 5%RH to 90%RH
	IP Grade	IP65				
	Dimensions L × W × H	12.95×4.52×2.18			inch	
		329×114.8×55.4			mm	
	Net Weight/pcs	-	3.4	-	kg	
	Warranty	-	5	-	Years	

### 4.Dimming Specifications

Please contact us for UART and RS485 dimming protocol.

### 5.Isolation

Isolation	AC Input	DC Output (CH1)	DC Output (CH2/CH3)	Dimming (SELV)	Housing
AC Input	/	No isolation	Double isolation	Double isolation	Basic
DC Output(CH1)	No isolation	/	Reinforced isolation	Double isolation	Basic
DC Output(CH2/CH3)	Double isolation	Reinforced isolation	/	Double isolation	Basic
Dimming (SELV)	Double isolation	Double isolation	Double isolation	/	Basic
Housing	Basic	Basic	Basic	Basic	/

### 6.Safety & EMC Compliance


Safety Category	Standard
CE	EN 61347-1, EN 61347-2-13
Dielectric Strength(Hi-pot)	Primary to Secondary: 4000VAC / 10mA Max / 60seconds (3seconds for production)
	Primary to Earth: 2000VAC / 10mA max./60 seconds (3 seconds for production)
	Dimming to Earth:500VAC 10mA max./60 seconds (3 seconds for production)
Insulation Resistance	50Mohm min.@ primary to secondary add 500Vdc test voltage
Grounded Resistance	0.1Ω max. @ 25A, 1 minute
EMI Standards	Notes
EN55015	Class B

	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired Operation.
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge, criteria B
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS, criteria A
EN 61000-4-4	Electrical Fast Transient / Burst-EFT: level 3, criteria B
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 4 kV, line to earth 6 kV, criteria B
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS, criteria A
EN 61000-4-8	Power Frequency Magnetic Field Test, criteria A
EN 61000-4-11	Voltage Dips, criteria B
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

Note1: This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

## 7. Performance Curve

### 7.1. Inrush Current Curve

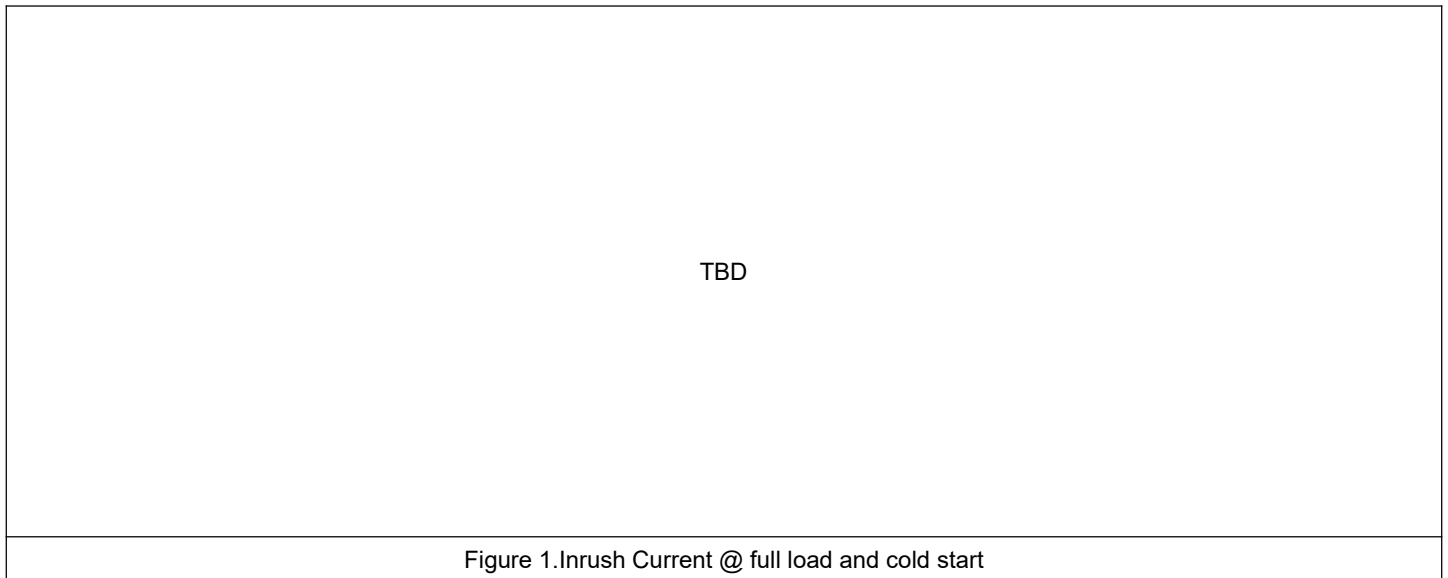

V <sub>in</sub> (VAC)	F <sub>LINE</sub> (Hz)	I <sub>PK_INRUSH</sub> (A)	T <sub>DURATION</sub> (μs)
400	50		

**7.2. Derating Curve**




Figure 2. Input Voltage Derating Curve

**7.3. Lifetime Curve**

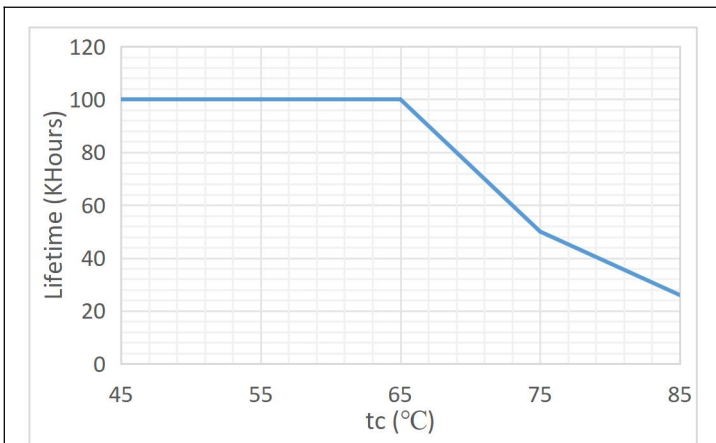


Figure 3. Life vs Case Temperature

**7.4. Operation Range Curve**

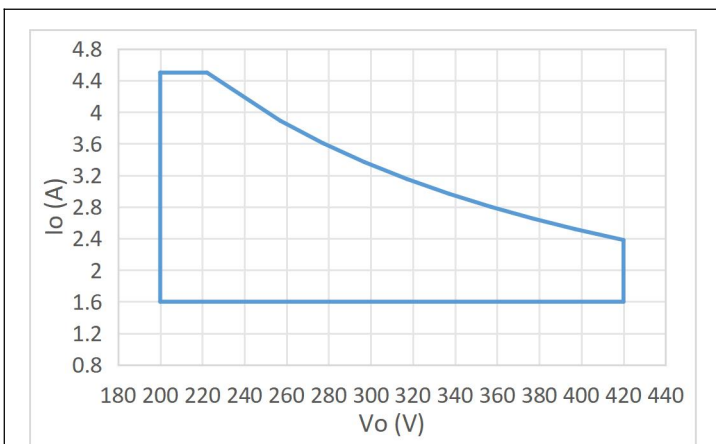


Figure 4. I/V Operating Area for CH1

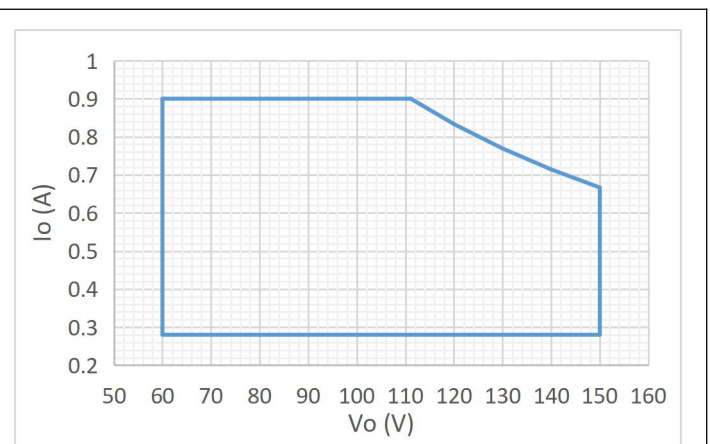


Figure 5. I/V Operating Area for CH2/CH3

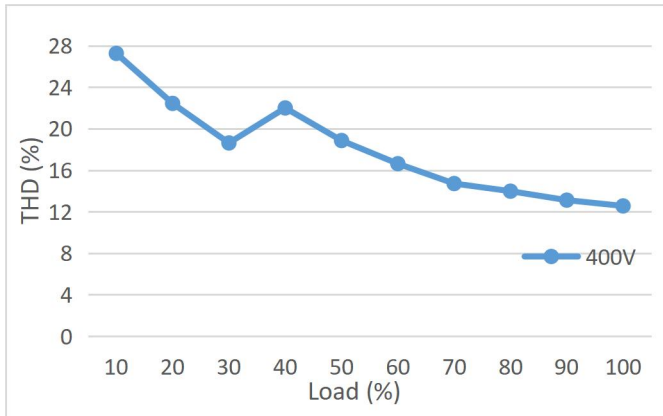
**7.5.General Performance Curve**


Figure 6.Total Harmonics vs Different Loads

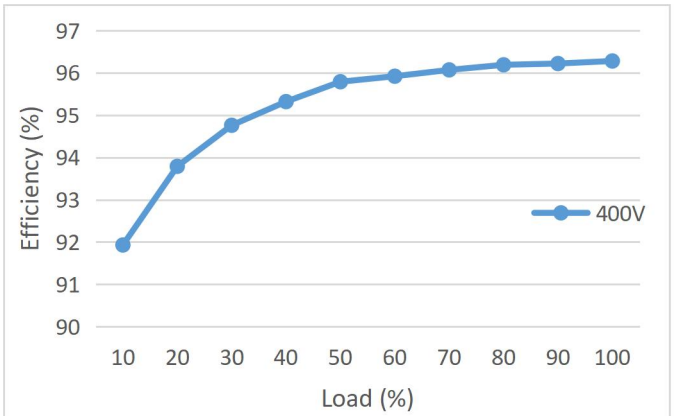


Figure 7.Efficiency vs Different Loads

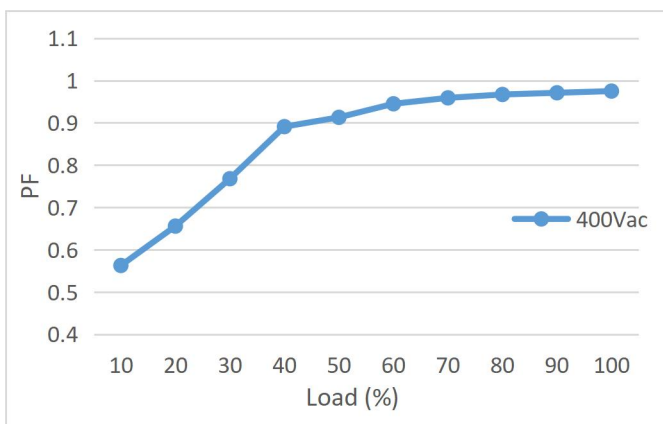


Figure 8.Power Factor vs Different Loads



## 8. Mechanical Specification

Take 1200FGH420CG-TC-485 as an example:

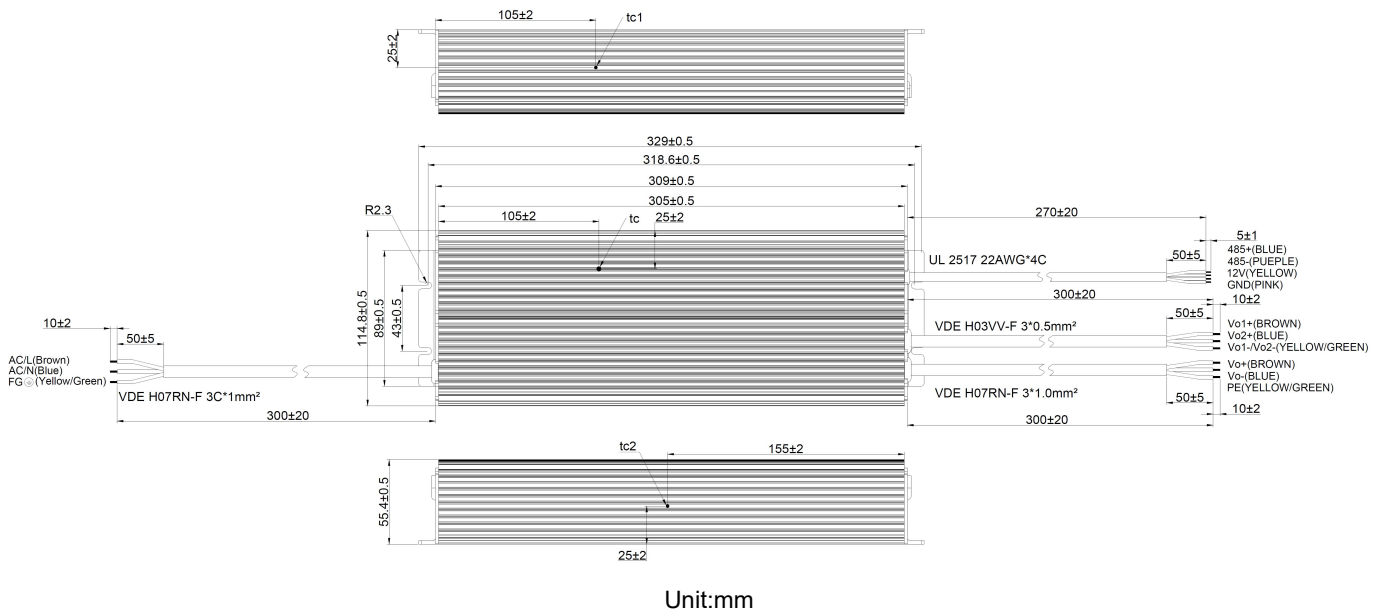


Figure 9. Mechanical Drawing

Note2: This diagram uses a 3-output channel configuration as an example—each reduction in output channels decreases one wire core in the auxiliary output.

Model	Dimming wire
-UART	UL2517, 3*22AWG, OD=5.2mm, DIM+(PURPLE)/12V(YELLOW)/DIM-(PINK)
-485	UL2517, 4*22AWG, OD=5.2mm, 485+(BLUE)/485-(PURPLE)/12V(YELLOW)/GND(PINK)

## 9. Ordering information

Part Number	Rated Input AC Voltage (VAC)	Channels output	Output whether with FG line	Dimming
1200FGH420CG-DC-485	347-400	2	With	485
1200FGH420CG-TC-485	347-400	3	With	485
1200FGH420CG-DC-UART	347-400	2	With	UART
1200FGH420CG-TC-UART	347-400	3	With	UART
1200FGH420C-DC-485	347-400	2	Without	485
1200FGH420C-TC-485	347-400	3	Without	485
1200FGH420C-DC-UART	347-400	2	Without	UART
1200FGH420C-TC-UART	347-400	3	Without	UART

## 10.Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2025/11/24	V0.0			
2026/1/15	V0.1	Modify:format		
		No Load Output Voltage	Max:550V	Max:500V(Measured at RMS value)
		Dielectric Strength(Hi-pot)	Primary to Secondary: 4200VAC / 10mA Max / 60seconds (3seconds for production)	Primary to Secondary: 4000VAC / 10mA Max / 60seconds (3seconds for production)
			Primary to Earth: 2100VAC / 10mA max./60 seconds (3 seconds for production)	Primary to Earth: 2000VAC / 10mA max./60 seconds (3 seconds for production)
		Lifetime	100000Hours(Measured at 400VAC input, 100%Load and 25°C Ta)	50000Hours(Measured at 400 VAC input, 100% load and 75°C case temperature; See Lifetime curve for the details)
		Modify:Isolation		
		Add:Dimming Specifications		
		Modify:Lifetime Curve		
Add:Operation Range Curve				