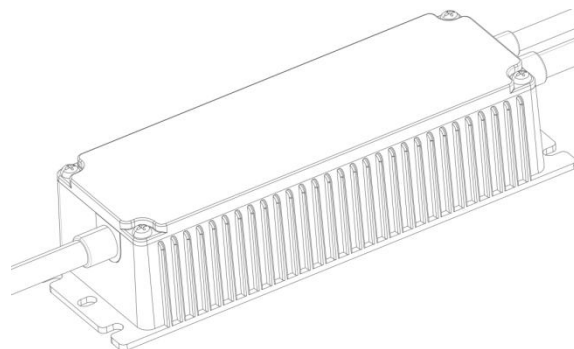


Features

- Programmable constant current and voltage output
- High efficiency: 93% typical @220Vac, full load
- High power factor: 0.98 typical. @ 220Vac, full load
- Isolated 0-10V/PWM/ Resistor Dimming
- With Lightning Protection & all-round protections
- 6kV/10kV surge capability
- IP67



Description

This specification describes the performance characteristics of a 150W versatile power supply for LED Driver. The output current of this series are programmable, and designed for 0-10V/PWM/Resistor dimming applications.

Model Name Definition

150	PHL	180	CV	-	XX	X	-	XXX
Rated Output Power	Series name	Maximum output voltage	Constant current and constant voltage output	Options: 1. D0 2. D1	Options: 1. U(UL Wire) 2. V(VDE&CCC Wire) 3. Blank(UL&VDE&CCC Wire)	Options		

Specifications

Part Number	Max. Output Power	Programmable Current Range	Output Voltage Range	Efficiency typical@220VAC	Dimming	AUX power
150PHL60CV-D0	150W	1.43-3.57A	25-60V	93%	0-10V	12V 200mA
150PHL60CV-D1	150W	1.43-3.57A	25-60V	93%	1-10V	/
150PHL180CV-D0	150W	0.48-1.19A	90-180V	93%	0-10V	12V 200mA
150PHL180CV-D1	150W	0.48-1.19A	90-180V	93%	1-10V	/

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Rated Input AC Voltage	100 Vac	-	277Vac	
Limit Input AC Voltage	90Vac	-	305Vac	
Input Frequency	47 Hz	50/60 Hz	63 Hz	
Leakage Current	-	-	0.75 mA	At 220Vac / 50Hz input , grounding effectively
Input AC Current	-	-	0.8A	Measured at full load and 220 Vac input.
Inrush Current	-	-	110A	At 220Vac input, 25°C cold start.
PF	0.95	-	-	At 220Vac, 80%-100% Load
THD	-	-	15%	At 220Vac, 80%-100% Load

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%Io set	-	5%Io set	At 25°C and full load condition
Total Output Current Ripple (pk-pk)	-	-	15%Io max	At 25°C and full load condition, ≤200Hz BW
Startup Overshoot Current	-	-	10%Io max	At 25°C and full load condition, ≤200Hz BW
No Load Output Voltage	-	-	210V	Only for 150PHL180CV
Line Regulation	-	-	±3%	Measured at 25°C and full load
Load Regulation	-	-	±3%	At 25°C condition
Turn-on Delay Time	-	-	2.0 s	Measured at 25°C and 220Vac input.
Temperature Coefficient of Io set	-0.05%/°C	-	0.05%/°C	Case temperature = 0°C ~Tc max
12V Auxiliary Output Voltage (150PHL60CV-D0/150PHL180C V-D0)	11V	12 V	15 V	
12V Auxiliary Output Source Current (150PHL60CV-D0/150PHL180C V-D0)	0 mA	-	200 mA	Return terminal is "Dim - "
OTP Tc	85°C	90°C	95°C	Output current will drop to 50% lowest, or shut down.
SCP				Hiccup mode, Auto recover
OPP				Auto recover
OCP				Auto recover

General Specifications

Parameter	Min.	Typ.	Max.	Notes
MTBF	234,000 Hours	-	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	50,000 Hours	-	-	Measured at 220Vac input, 80%Load and 75°C case temperature; See lifetime vs. Tc curve for the details
Operating Case Temperature for Safety Tc_s	-40°C	-	90°C	
Operating Case Temperature for Warranty Tc_w	-40°C	-	80°C	
Operating Ambient Temperature Ta	-40°C	-	60°C	At 220-277Vac input.
Storage Temperature	-40°C	-	85°C	Humidity: 5%RH to 90%RH
Dimensions Inches (L × W × H) Millimeters (L × W × H)	6.32×2.09×1.42 in 160.4×53×36mm			
Net Weight/pcs	-	543g	-	

Dimming Specifications

1. 0-10V Dimming(150PHL60CV-D0/150PHL180CV-D0)

Parameter	Min.	Typ.	Max.	Notes
Absolute Maximum Voltage on the Vdim (+) Pin	-1 V	-	15 V	
Source Current on Vdim (+)Pin	90uA	100uA	110uA	
Dimming Output Range	-	10%Io set	Io set	80%Io max ≤ Io set ≤ 100%Io max
	-	8%Io max	Io set	Io set < 80%Io max
Recommended Dimming Input Range	0V	-	10 V	Default 0-10V dimming mode.
Dim off Voltage	0.3 V	0.5 V	0.8V	
Dim on Voltage	0.5V	0.7 V	1 V	
Dim off Resistance	5kΩ	8kΩ	10kΩ	
Dim on Resistance	7kΩ	10kΩ	12kΩ	
Hysteresis	-	0.2 V	-	
PWM_in High Level	9.5 V	10V	10.5 V	
PWM_in Low Level	-0.3 V	-	0.6 V	
PWM_in Frequency Range	500 Hz	-	3 KHz	
PWM_in Duty Cycle	1%	-	98%	
PWM Dimming off	3%	5%	7%	
PWM Dimming on	5%	7%	9%	

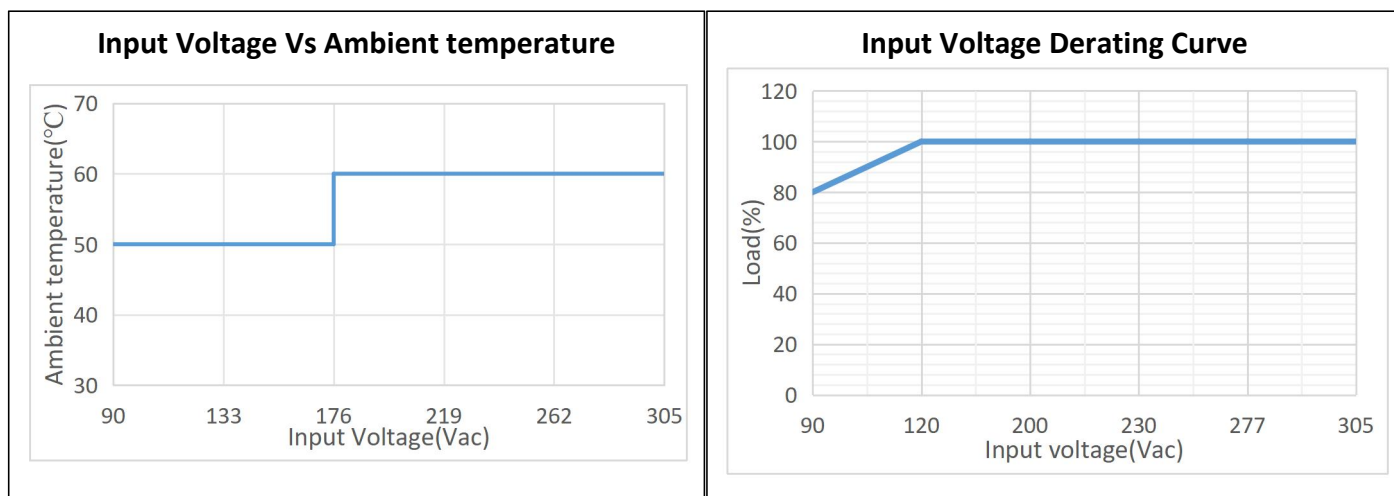
2. 1-10V Dimming(150PHL60CV-D1/150PHL180CV-D1)

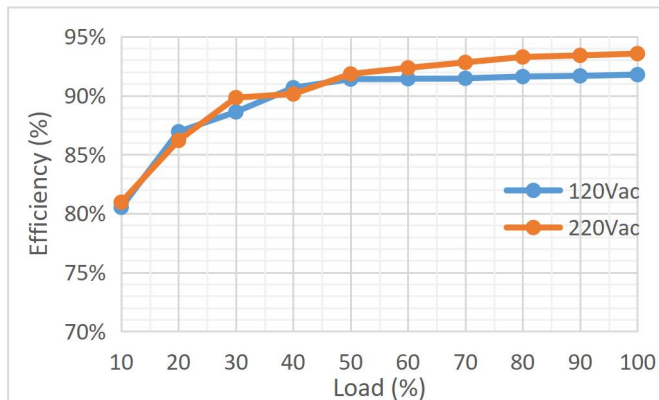
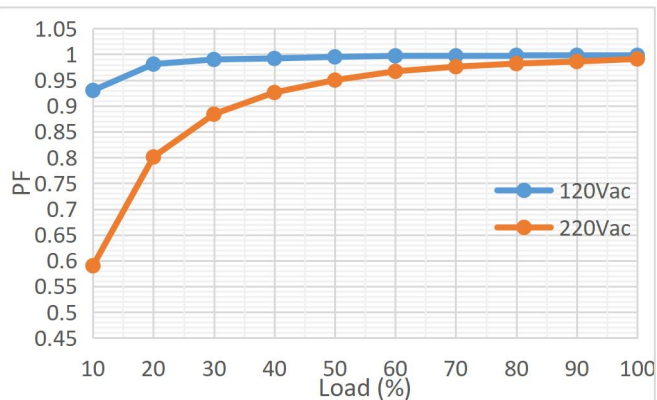
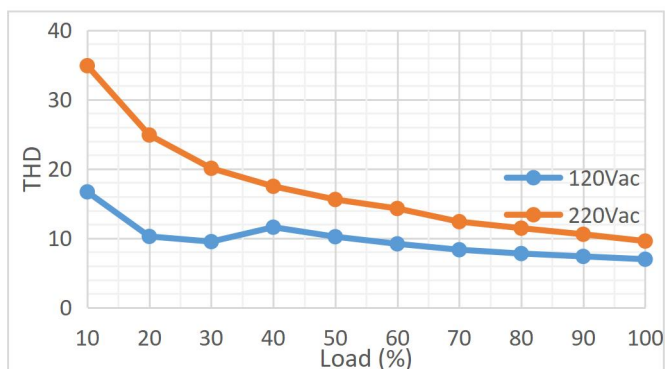
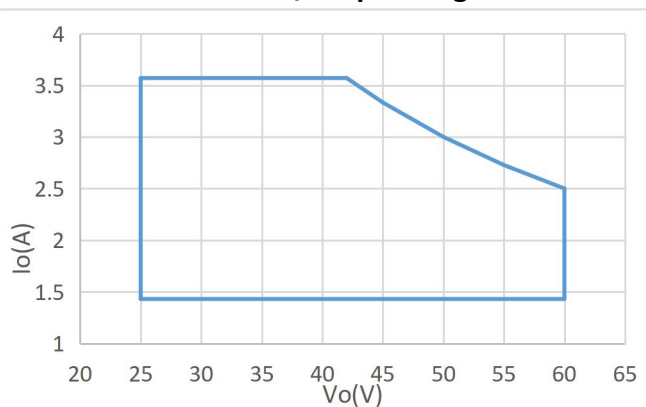
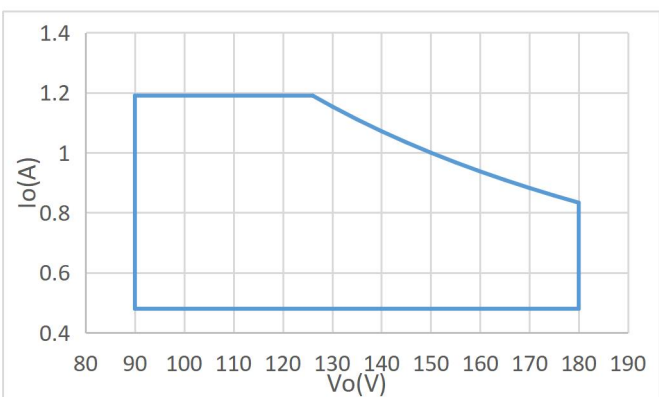
Parameter	Min.	Typ.	Max.	Notes
Absolute Maximum Voltage on the Vdim (+) Pin	-1 V	-	15 V	
Source Current on Vdim (+)Pin	90uA	100uA	110uA	
Dimming Output Range	-	10%Io set	Io set	80%Io max ≤ Io set ≤ 100%Io max
	-	8%Io max	Io set	Io set < 80%Io max
Recommended Dimming Input Range	1V	-	10 V	Default 1-10V dimming mode.
PWM_in High Level	9.5 V	10V	10.5 V	
PWM_in Low Level	-0.3 V	-	0.6 V	
PWM_in Frequency Range	500 Hz	-	3 KHz	
PWM_in Duty Cycle	1%	-	98%	

Safety & EMC Compliance

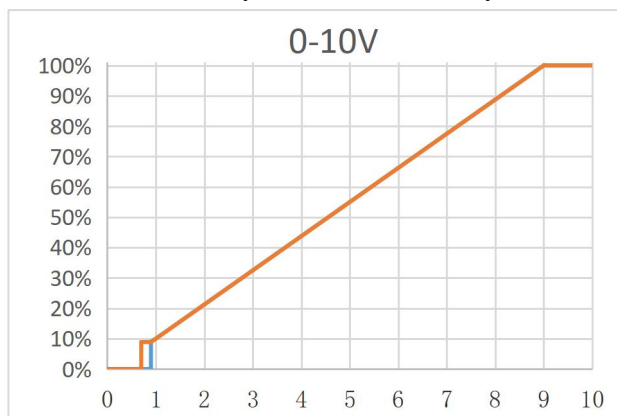
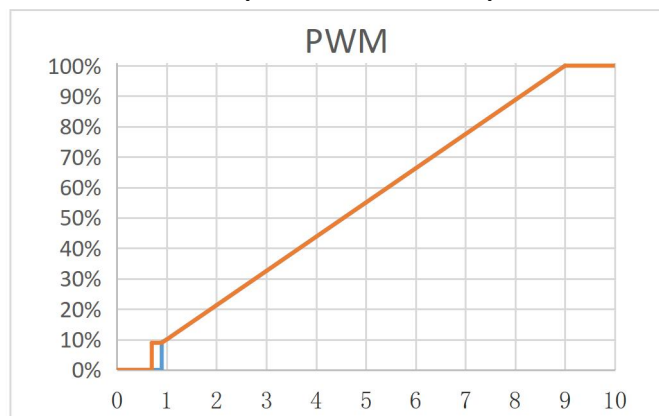
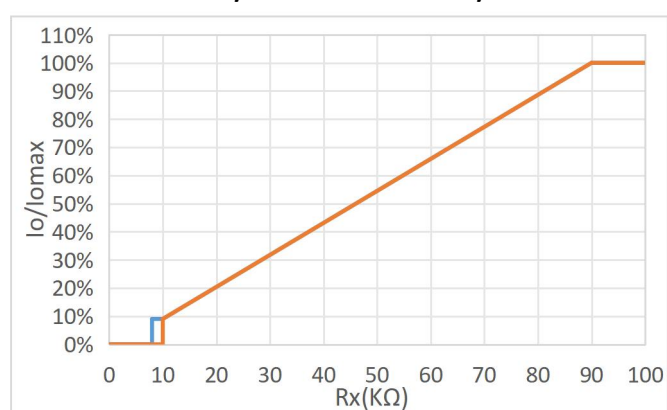
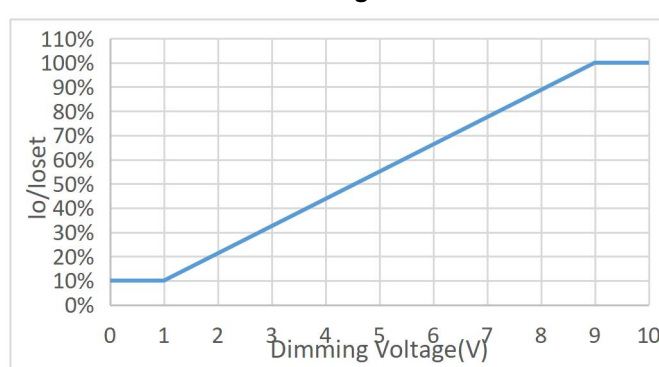
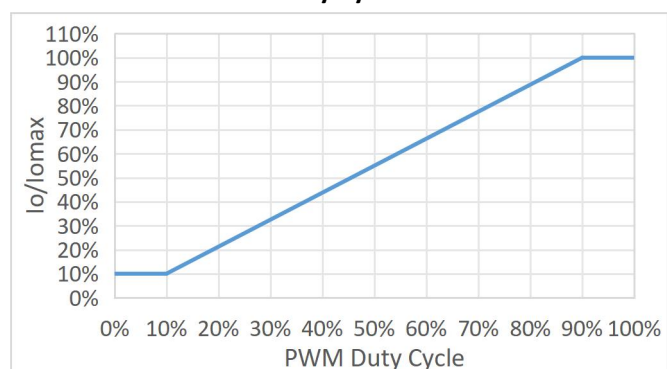
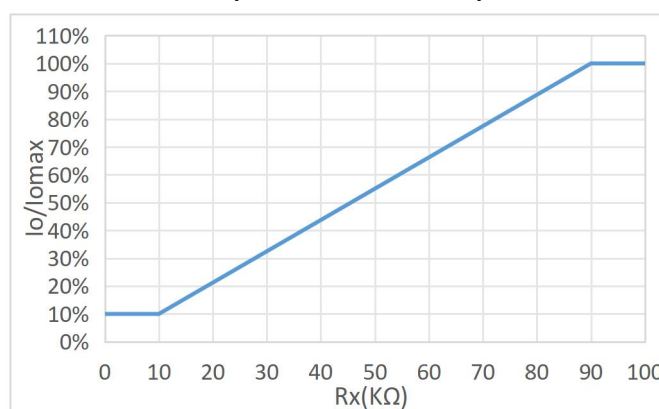
Safety Category	Standard
UL/CUL	UL8750,CAN/CSA-C22.2 No. 250.13-12
Dielectric Strength(Hi-pot)	Primary to Secondary: 3200Vac 10mA max
	Primary to Earth: 1600Vac 10mA max.
	Secondary to Earth: 1600Vac 10mA max.
	Dimming to Secondary: 1600Vac 10mA max.
Insulation Resistance	50Mohm min.@ primary to secondary add 500Vdc test voltage
Grounded Resistance	0.1Ω max. @ 25A, 1 minute
ENEC&CE	EN61347-1, EN 61347-2-13
CB	IEC 61347-1, IEC 61347-2-13
CCC	GB19510.1, GB19510.14
EMI Standards	Notes
EN55015	Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired Operation.
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge, Criteria A
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS, Criteria A
EN 61000-4-4	Electrical Fast Transient / Burst-EFT: level 3, Criteria B
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 6kV, line to earth 10kV, Criteria B
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS, Criteria A
EN 61000-4-8	Power Frequency Magnetic Field Test, Criteria A
EN 61000-4-11	Voltage Dips Criteria B
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

Performance Curve

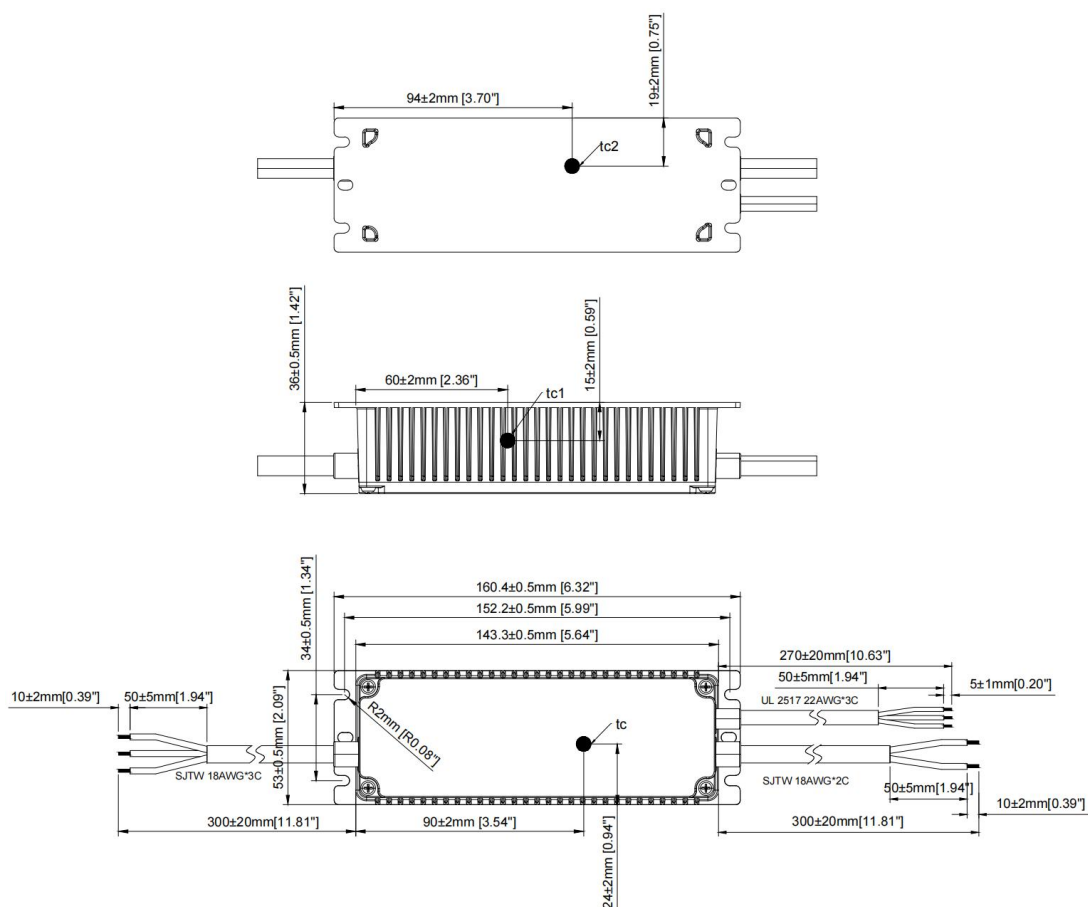


150PHL180CV Efficiency Vs Different Loads

150PHL180CV Power Factor Vs Different Loads

150PHL180CV Total Harmonics Vs Different Loads

150PHL60CV I/V Operating Area

150PHL180CV I/V Operating Area


Dimming Curve

150PHL60CV-D0/150PHL180CV-D0 I_o/I_r vs V_{dim}

150PHL60CV-D0/150PHL180CV-D0 I_o/I_r vs V_{dim}

150PHL60CV-D0/150PHL180CV-D0 I_o/I_{omax} vs R_x

150PHL60CV-D1/150PHL180CV-D1 I_o/I_{oset} vs Dimming Voltage

150PHL60CV-D1/150PHL180CV-D1 I_o/I_{omax} vs PWM Duty Cycle

150PHL60CV-D1/150PHL180CV-D1 I_o/I_{omax} vs R_x


Mechanical Drawing



Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2023/3/10	V1.0			
2023/9/9	V1.1	Update mechanical design		
2023/9/28	V1.2	Update Mechanical Drawing		Update the installation size
2023/10/26	V1.3	Update Mechanical Drawing		Update the size and add tc
2023/12/27	V1.4	No Load Output Voltage	MAX: 198V	MAX: 205V
		Update mechanical design		
		Inrush Current	MAX: 125A	MAX: 110A
		Update Input Voltage Derating Curve		
		Add Net Weight		
2024/1/3	V1.5	Operating Ambient Temperature Ta	MAX:70°C	MAX:55°C
		Operating Ambient Temperature Ta	MAX:70°C	MAX:60°C
		Operating Ambient Temperature Ta	Note: At 200-277Vac input.	Note: At 220-277Vac input.
2024/1/9	V1.6	Dielectric Strength(Hi-pot)	Primary to	Primary to Secondary:

			Secondary:3000Vac / 10mAMax	3750Vac 10mA max
			Primary to Earth: 1500Vac 10mA max.	Primary to Earth: 1600Vac 10mA max.
			Secondary to Earth: 500Vac 10mA max.	Secondary to Earth: 1600Vac 10mA max.
			Dimming to Secondary: 1500Vac 10mA max.	Dimming to Secondary: 1600Vac 10mA max.
		No Load Output Voltage	MAX: 205V	MAX: 215V
		Add Input Voltage Vs Ambient temperature Curve		
		Update Model Name Definition		
		Safety Category		Add ENEC/CE/CB/CCC
		Input Frequency	Min: 45Hz	Min: 47Hz
2024/8/31	V1.7	Add Dim off Resistance/Dim on Resistance		
		Add Io/Iomax vs Rx		
		Total Output Current Ripple (pk-pk)	Note: At full load condition, 20 MHz BW	Note: At 25°C and full load condition, ≤200Hz BW
		Startup Overshoot Current	Note: At full load condition	Note: At 25°C and full load condition, ≤200Hz BW
		No Load Output Voltage	Max: 215V	Max: 210V
		Delete 150PHL180CV-DA/150PHL60CV-DA		
2024/12/20	V1.8	Dielectric Strength(Hi-pot)	Primary to Secondary: 3750Vac 10mA max	Primary to Secondary: 3200Vac 10mA max
		Turn-on Delay Time	Note: Measured at 220Vac input.	Note: Measured at 25°C and 220Vac input.
		Dimming Output Range	Min: 10%Io set Min: 8%Io max	Typ.: 10%Io set Typ.: 8%Io max
		Line Regulation/Load Regulation		Add 25°C condition
		Add IP67		
		Add 150PHL60CV-D1/150PHL180CV-D1 Io/Iomax vs PWM Duty Cycle curve		